



## GS RAVE 8F454

### General Specifications

Nominal Diameter	200 mm
Nominal Impedance	4 Ohm
Minimum Impedance	3,1 Ohm
RMS Power	350 WRMS
Max Power	700 WRMS
Frequency Range	70 ÷ 9000 Hz
Efficiency (Eta 0)	3,04%
Sensibility (1 W - 1 mt)	96,9 dB
Sensibility (2.83 V)	102,9 dB
Voice coil Diameter	45 mm
Voice Coil Wire	CCAW

### Thiele&Small Parameters



Re (Ohm)	3,08
Fs (Hz)	118
Le (mH)	0,095
Vas (L)	8,64
Cms (mm/N)	0,1
BxL (T*m)	9,5
Qts	0,41
Qms	4,38
Qes	0,45
Xmax (mm - one way)	3,2
Mms (g)	17,7

### Technical Parameter

Voice coil winding height	10 mm
Voice coil former	kapton
Magnet material	ferrite
Magnet dimension	140*50*20 mm
Gap Height	6 mm
Demulation ring	yes
Crossover advice HPF	120 Hz - 18 dB
Crossover advice LPF	800 Hz - 12 dB
Minimum power advice	80 WRMS
Terminal connection	Push terminal
Surround Material	Cloth
Surround type	Dual wave
Cone material	Pressed paper

### Speaker / Package Dimension

Outer diameter	208 mm
Installation diameter	188 mm
Mounting depth	92 mm
Magnet diameter	140 mm
Type basket	Steel
Volume speaker	1,3 l
Speaker Weight	3,5 kg
Pakage Weight	3,9 kg
Shipping box	23*23*11 cm

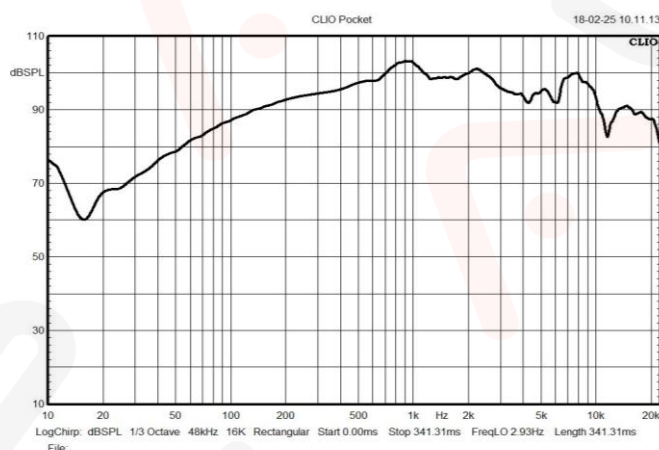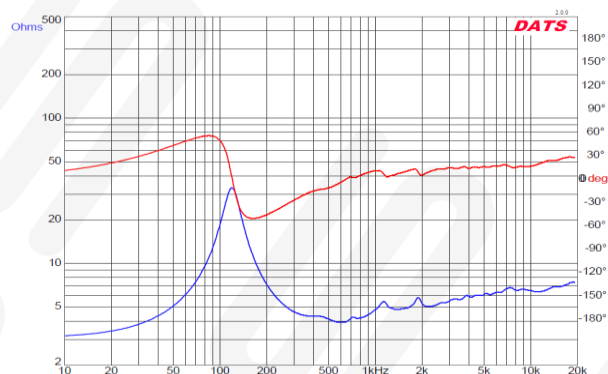

### Drawing dimension / installation

